

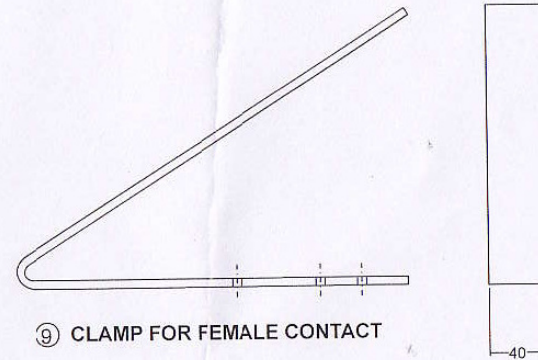


① BASE CHANNEL

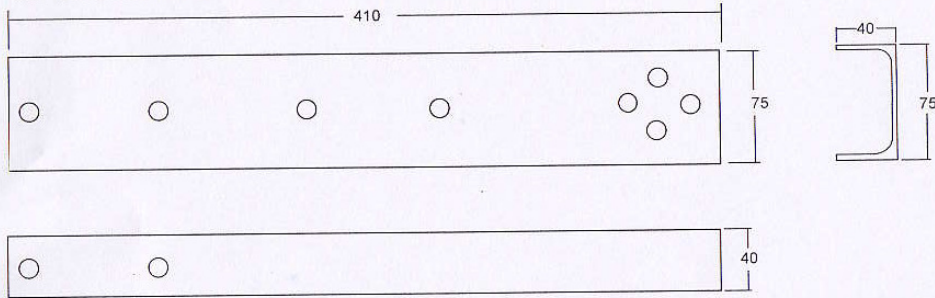


⑨ CLAMP FOR FEMALE CONTACT

② ARCING HORN




ITEM	A	B
MOVING CONTACT SIDE	185 mm	40 mm
FIX CONTACT SIDE	230 mm	40 mm


④ MOVING CONTACT




⑥ BASE CONTACT - MALE

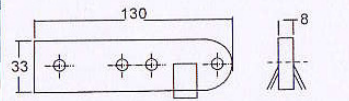


⑩ CONTACT GUARD




⑫ PHASE CONNECTING SHAFT




③ BEARING PLATE

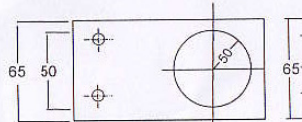


⑦ BASE CONTACT - FEMALE

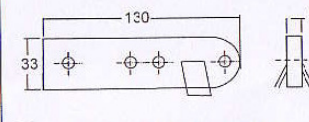

⑧ FIXED FEMALE CONTACT

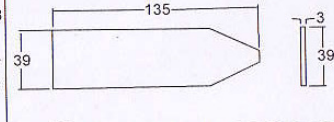


⑤ TILTING BASE

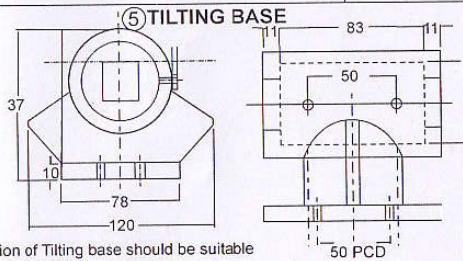


Dimension of Tilting base should be suitable for supplied channel

⑪ SPRING




⑬ BEARING BUSH



SR NO.	PART NAME	MATERIAL	QT.
1	BASE CHANNEL	M.S.	3
2	ARCING HORN 10 mm Ø ROAD	M.S.	6
3	BEARING PLATE	M.S.	6
4	MOVING CONTACT		
5	TILTING BASE	C.I.	3
6	BASE CONTACT - MALE	G.M.	3
7	BASE CONTACT - FEMALE	G.M.	3
8	FIXED FEMALE CONTACT		
9	CLAMP FOR FEMALE CONTACT		
10	CONTACT GUARD	M.S.	6
11	SPRING 1.2 THICK 8 TURN	SPRING STEEL	12
12	PHASE CONNECTING SHAFT	M.S. GALV.	1
13	BEARING BUSH	BRASS	5
14	OPERATING HANDLE	M.S.	1

⑭ OPERATING HANDLE

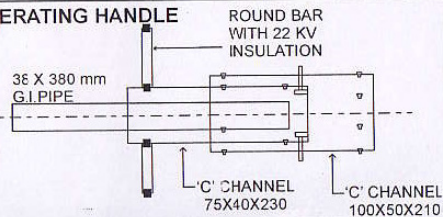

UTTAR GUJARAT VIJ COMPANY LIMITED

Title :: Schematic / Reference Drawing of Parts for 11KV Composite A.B. Switch (400 Amp.)

Drg No:- UGVCLSP/001 O&M 20.02 Rev:- 00